

U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000
U.S. PAT. OFF. COMM. PAMPHLET NO. 1000

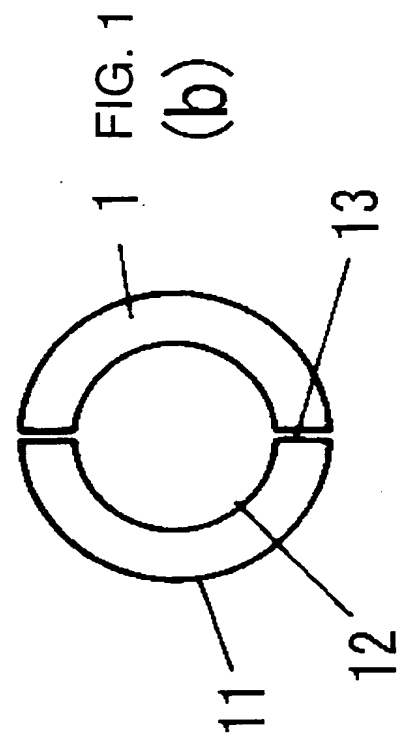
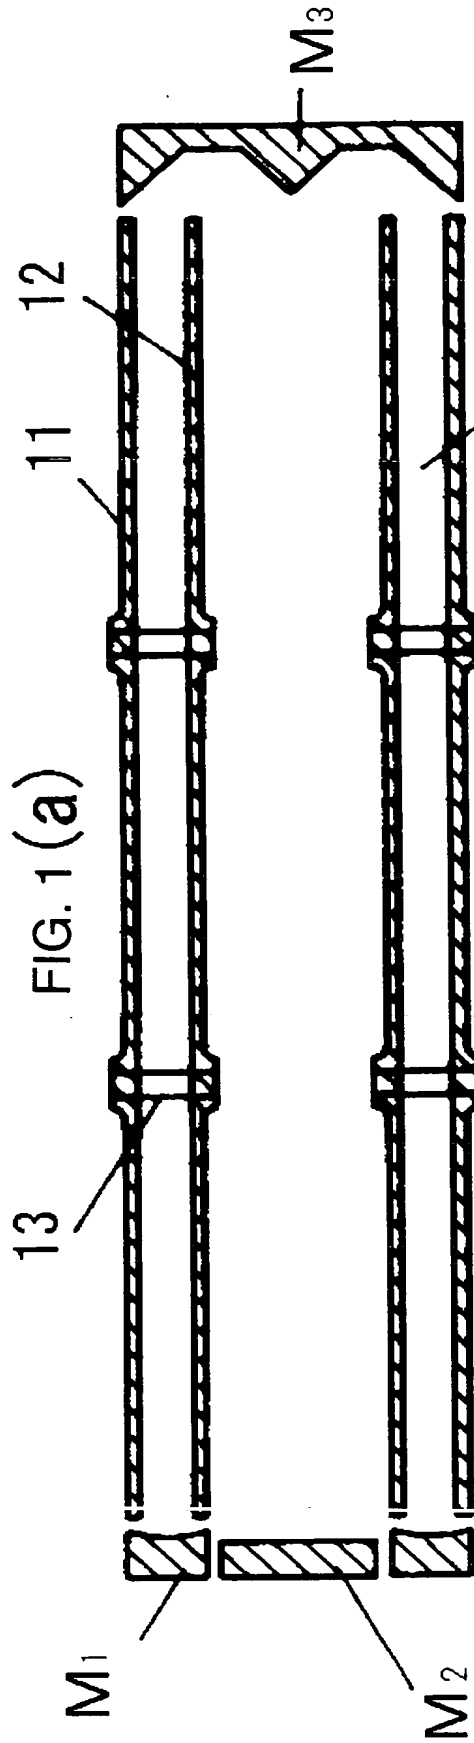


FIG. 2 is a perspective view of the device of FIG. 1, showing the device in a closed position. The device is shown in a perspective view, and the dashed lines indicate the internal structure of the device. The device is shown in a perspective view, and the dashed lines indicate the internal structure of the device.

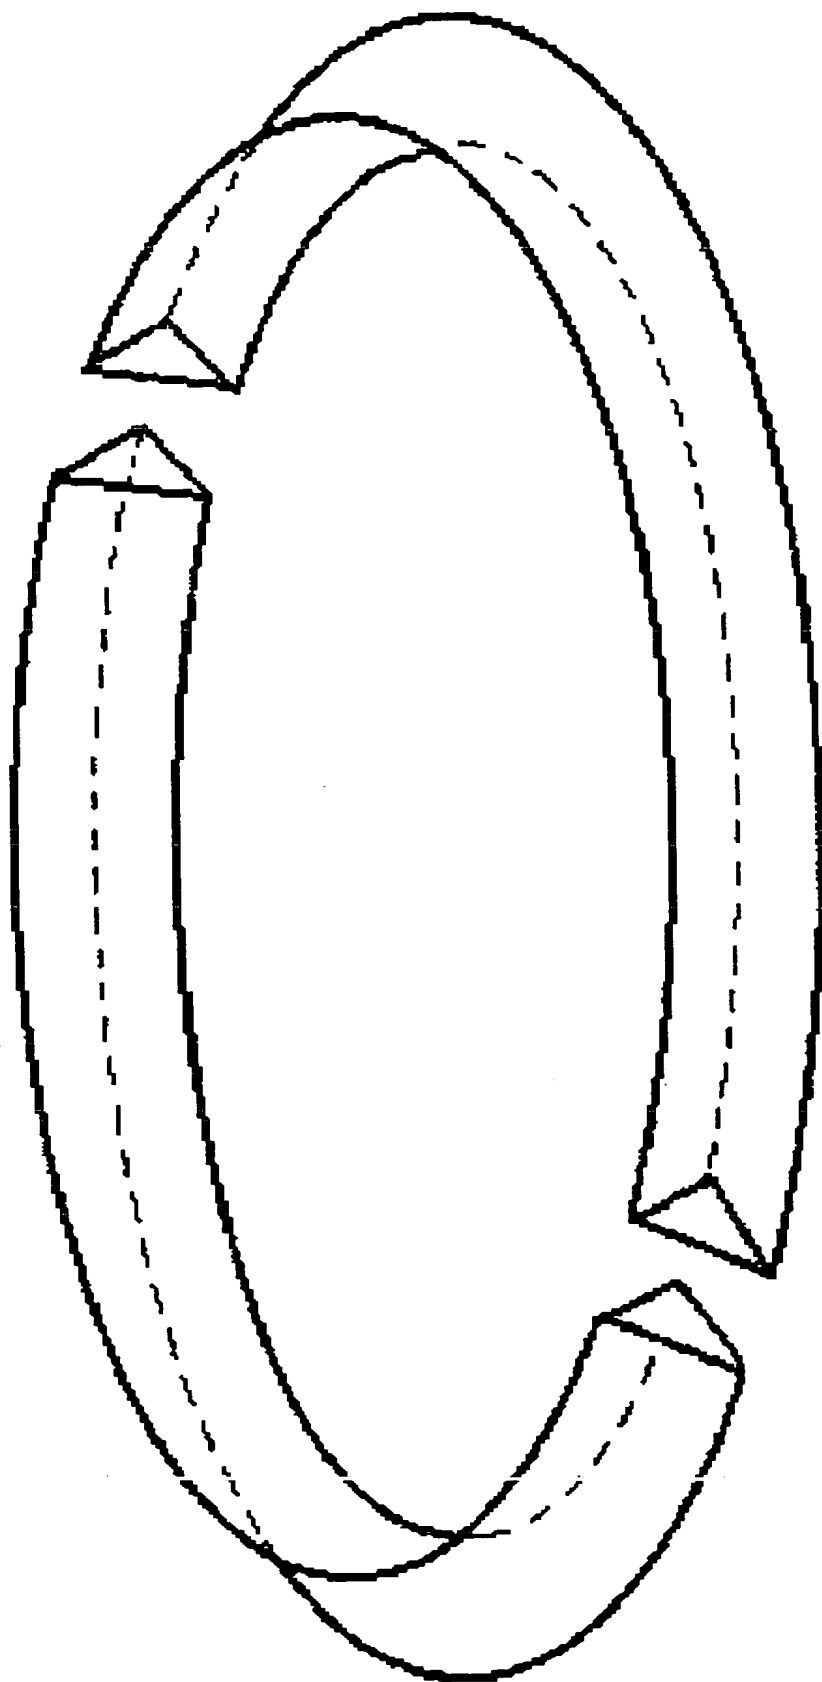


FIG. 2

THESE PAGES ARE THE PROPERTY OF THE U.S. AIR FORCE AND ARE TO BE RETURNED TO THE U.S. AIR FORCE WHEN REQUESTED.

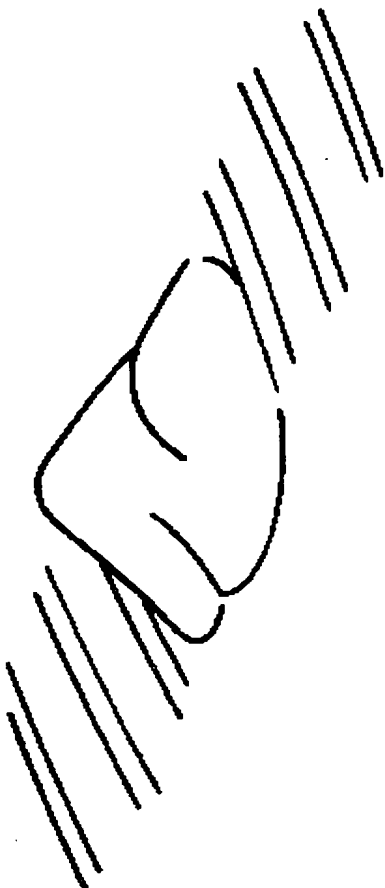


FIG. 3 (a)



FIG. 3 (b)

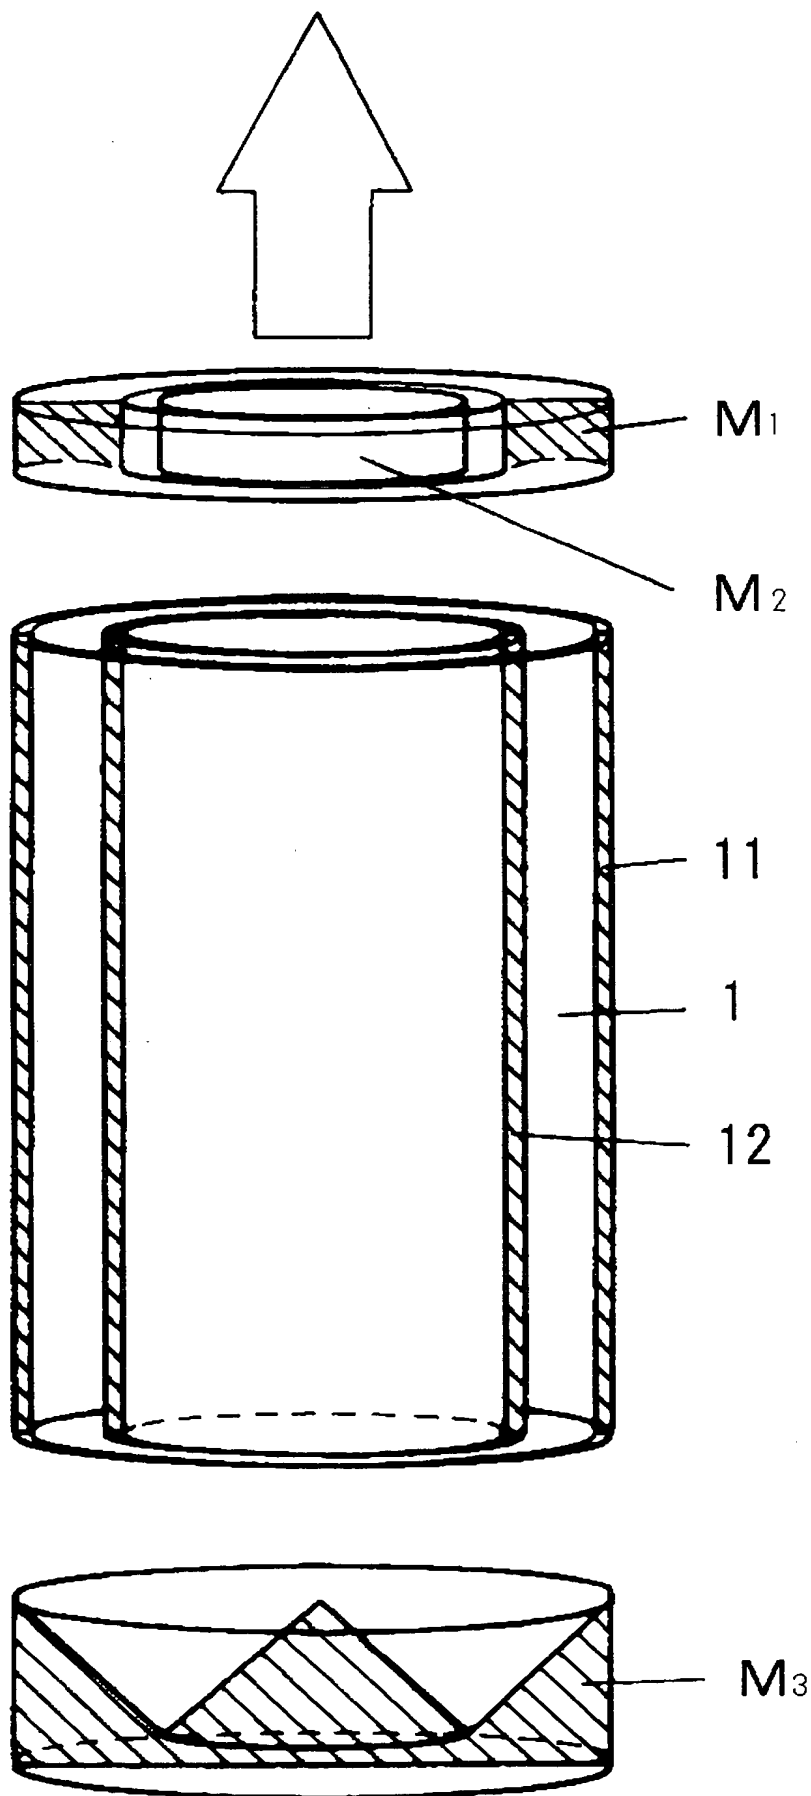


FIG. 4

FIG. 5 is a schematic diagram of a system for monitoring a process. The system includes a process 10, a sensor 20, a controller 30, and a display 40. The sensor 20 is connected to the process 10 and the controller 30. The controller 30 is connected to the display 40. The display 40 displays the output of the controller 30.

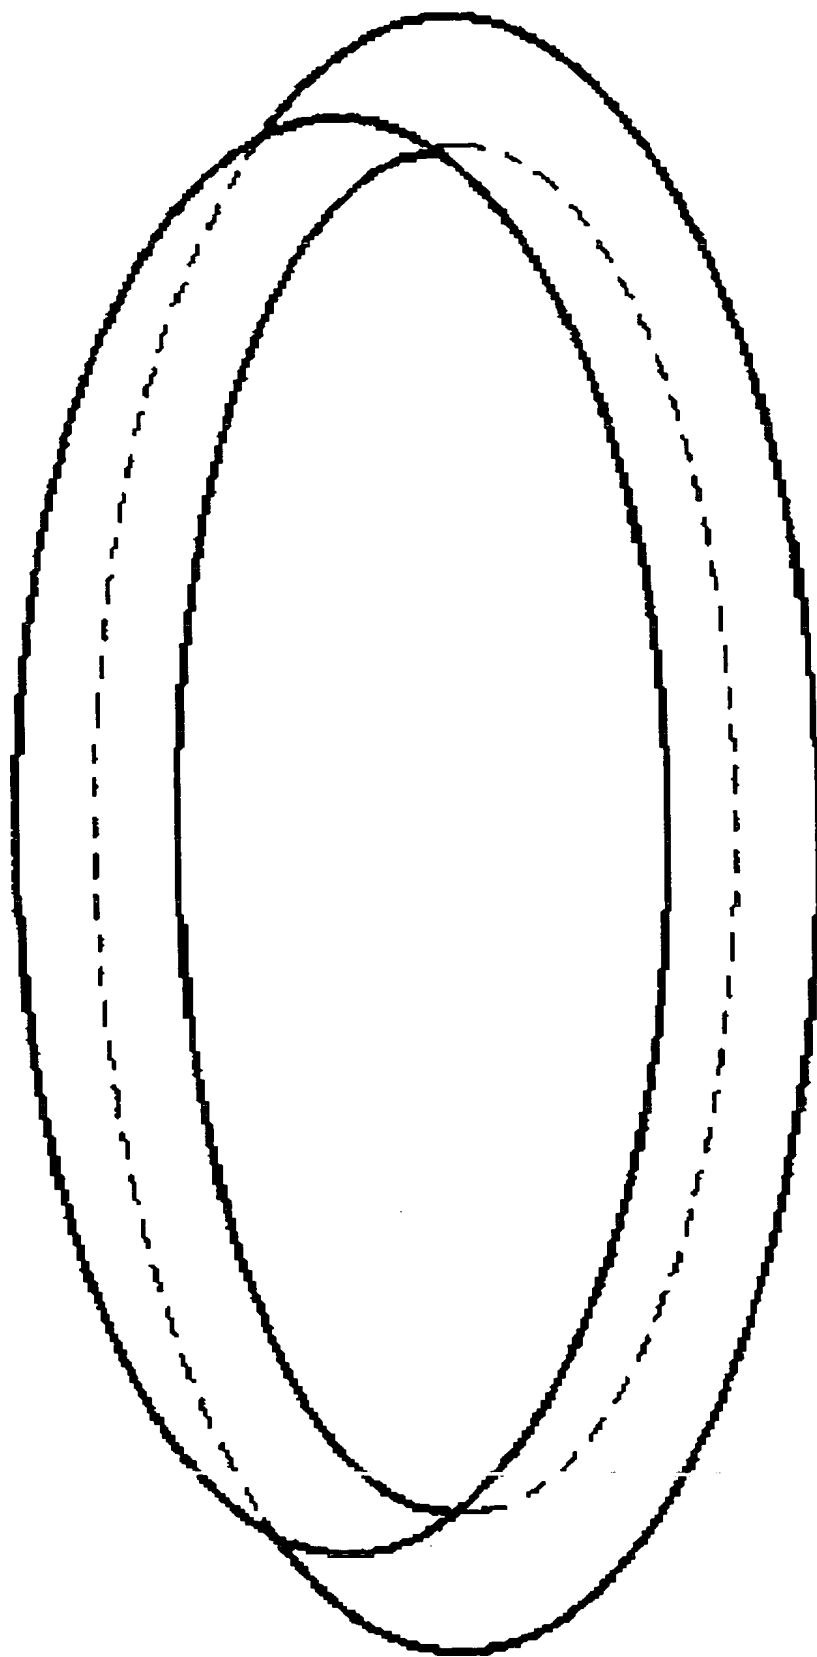


FIG. 5

FIG. 6
(a)

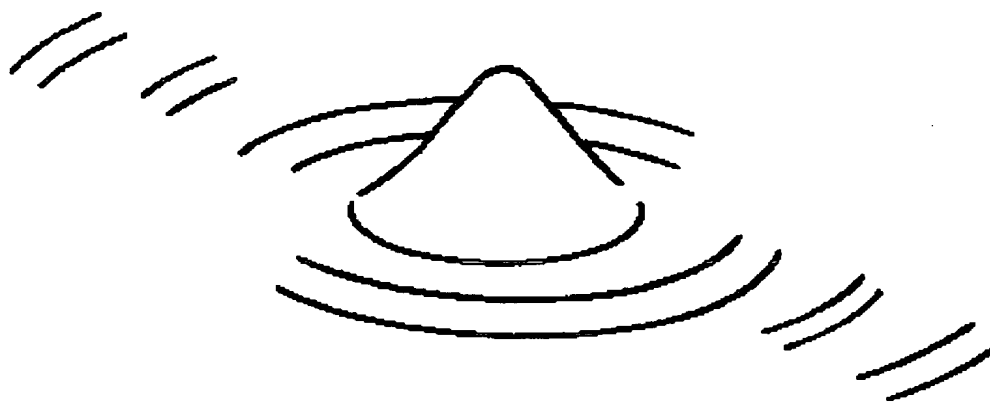


FIG. 6
(b)



FIG. 7 is a cross-sectional view of the ring 10, showing the internal structure of the ring 10, including the inner ring 11 and the outer ring 12. The ring 10 is shown in a cross-sectional view, with the inner ring 11 and the outer ring 12. The ring 10 is shown in a cross-sectional view, with the inner ring 11 and the outer ring 12.

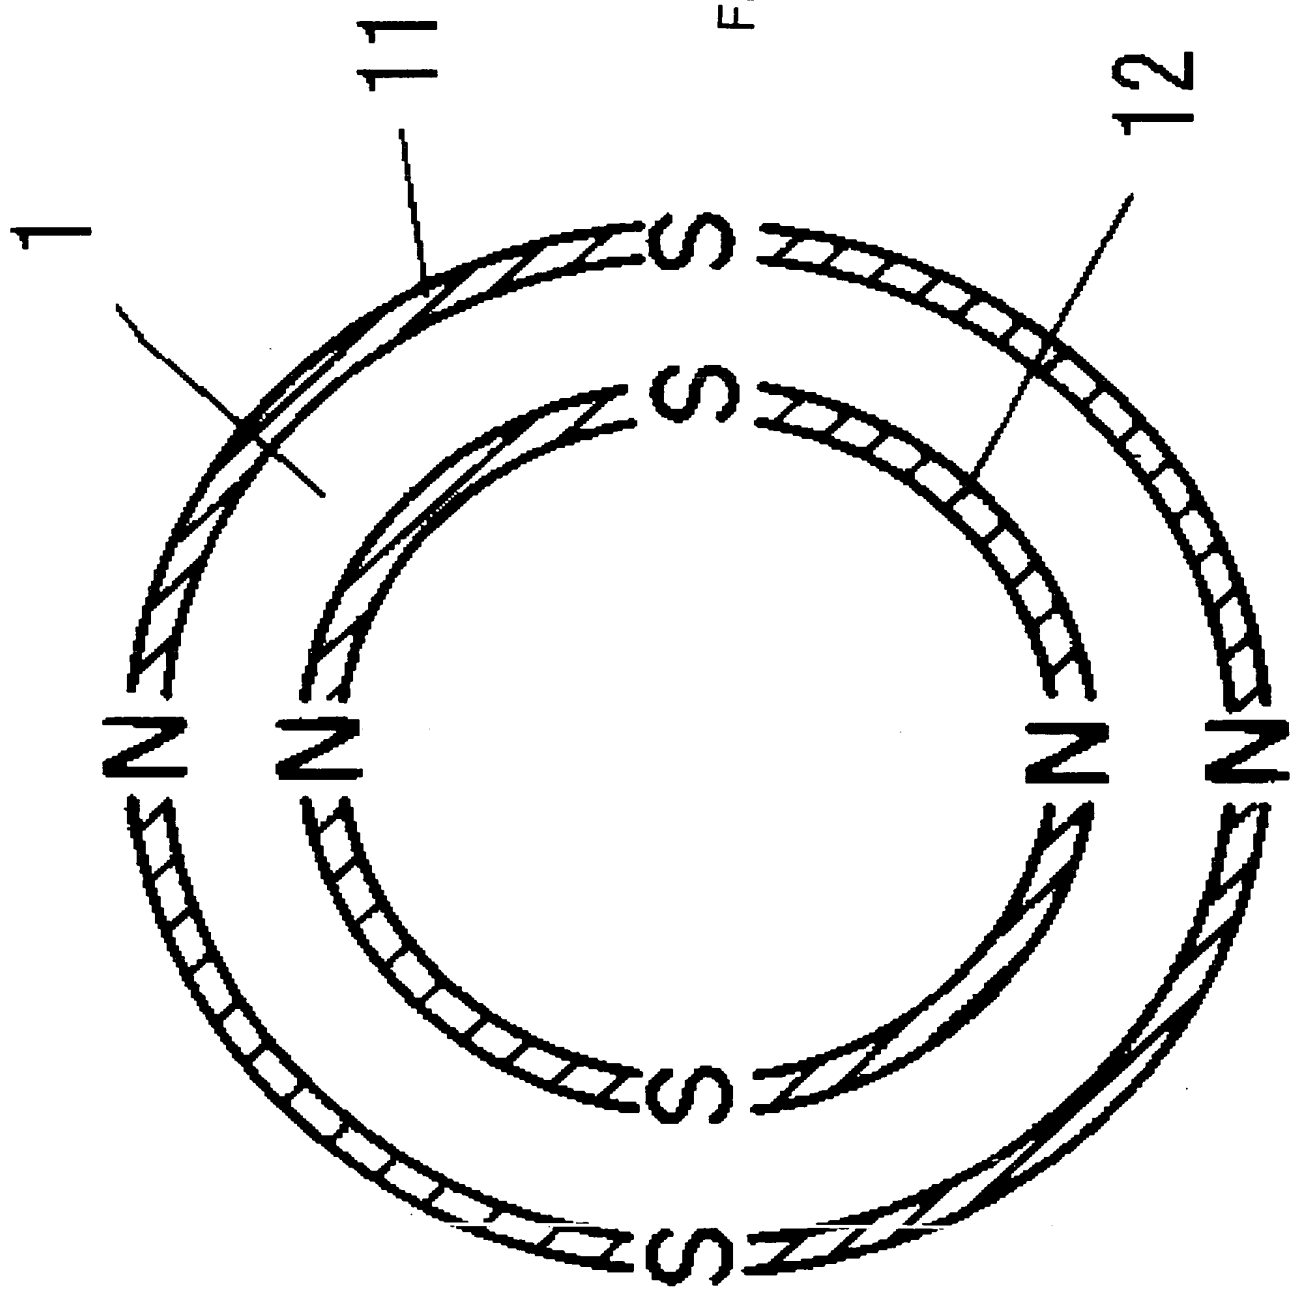


FIG. 7